


# INTRODUCTION


## SAMPLE LAYOUTS

Criteria re “enclosed” and “indoor”

- Samples to assist in applying criteria re: enclosure of perimeter of outdoor eating and drinking areas.
- Wall opening criteria applies if there is a roof or other covering over more than 25% of the total floor area.
- If the roof or other covering is less than 25% of the total floor area, the area is considered to be outdoor regardless of how much of the perimeter is enclosed.

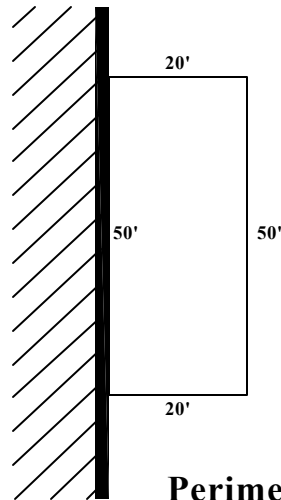

## Layout #1

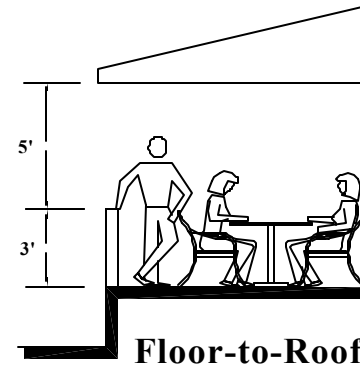

### **Step 1: the perimeter**

This perimeter is 140 ft long. At least 70 ft (50%) of this must not be enclosed floor-to-roof.

### **Step 2: the floor-to-roof distance**


This floor-to-roof distance is 8ft. At least 4 ft (50%) of its vertical face must be open.

### **Step 3: requirement calculation**


1- This perimeter has 90 ft (64%) of its length not enclosed floor-to-roof.

2- This floor-to-roof distance has 5 ft (63%) of its vertical face open.

**This layout would be considered to be outdoor.**

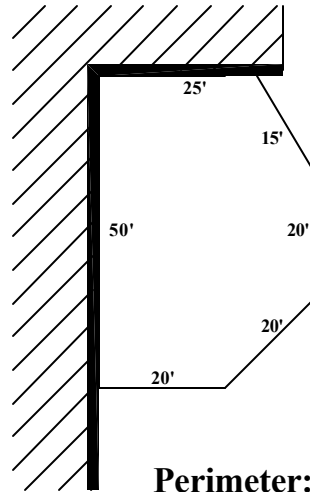

## Layout #2

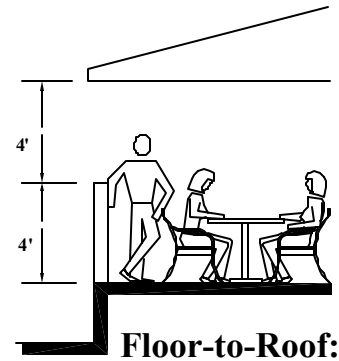

### Step 1: the perimeter

This perimeter is 150 ft long. At least 75 ft (50%) must not be enclosed floor-to-roof.

### Step 2: the floor-to-roof distance



This floor-to-roof distance is 8 ft. At least 4 ft (50 %) of its vertical face must be open.

### Step 3: requirement calculation

- 1 - This perimeter has 75 ft (50%) of its length not enclosed floor-to-roof.
- 2 - This floor-to-roof distance has 4ft (50%) of its vertical face open.

**This layout would be considered to be outdoor.**

## Layout #3

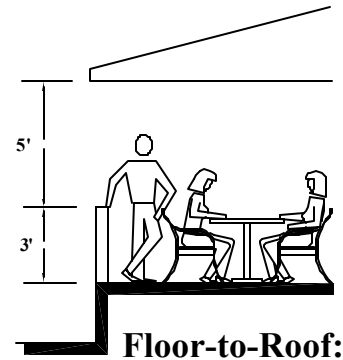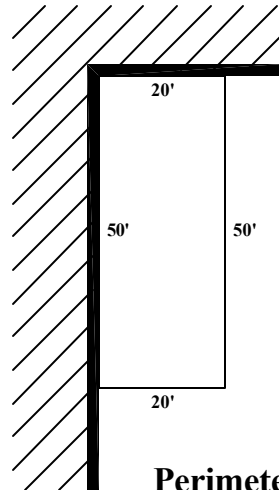

### Step 1: the perimeter

This perimeter is 140 ft long. At least 70 ft (50%) must not be enclosed floor-to-roof.

### Step 2: the floor-to-roof distance



This floor-to-roof distance is 8 ft. At least 4 ft (50%) of its vertical face must be open.

### Step 3: requirement calculation

- 1 - This perimeter has 70 ft (50%) of its length not enclosed floor-to-roof.
- 2 - This floor-to-roof distance has 5 ft (63%) of its vertical face open.

**This layout would be considered to be outdoor.**

## Layout #4

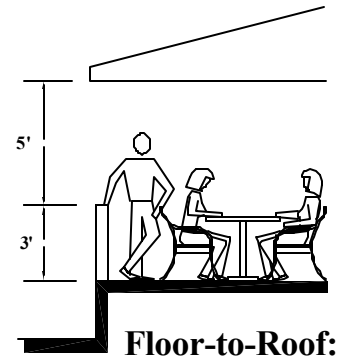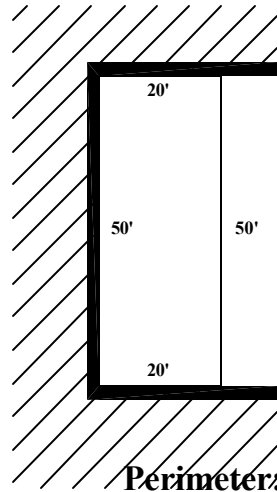

### Step 1: the perimeter

This perimeter is 140 ft long. At least 70 ft (50%) of this must not be enclosed floor-to-roof.

### Step 2: the floor-to-roof distance

This floor-to-roof distance is 8 ft. At least 4ft (50%) of its vertical face must be open.



### Step 3: requirement calculation

1 - This perimeter has 50 ft (36%) of its length not enclosed floor-to-roof.

2 - This floor-to-roof distance has 5 ft (63%) of its vertical face open.

**This layout would be considered enclosed.**

## Layout #5

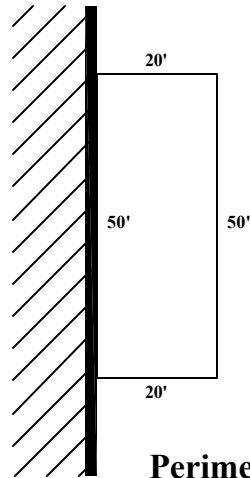

### Step 1: the perimeter

This perimeter is 140 ft long. At least 70 ft (50%) must not be enclosed floor-to-roof.

### Step 2: the floor-to-roof distance

This floor-to-roof distance is 8 ft. At least 4 ft (50 %) of its vertical face must be open.



### Step 3: requirement calculation

1 - This perimeter has 90 ft (63%) of its length not enclosed floor-to-roof.

2 - This floor-to-roof distance has 3.5 ft (44%) of its vertical face open.

**This layout would be considered enclosed.**

## Layout #6

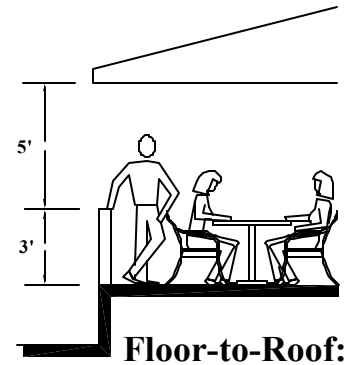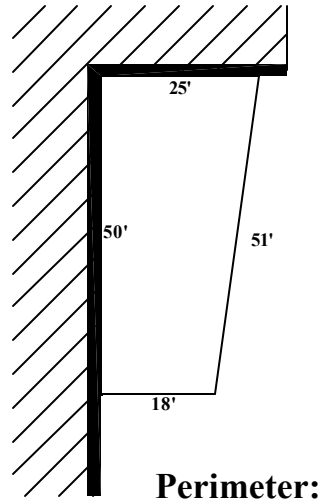

### **Step 1: the perimeter**

This perimeter is 144 ft long. At least 72 ft (50%) of this must not be enclosed floor-to-roof.

### **Step 2: the floor-to-roof**

This floor-to-roof distance is 8 ft. At least 4 ft (50%) of its vertical face must be open.

### **Step 3: requirement calculation**

1 - This perimeter has 69 ft (48%) of its length not enclosed floor-to-roof.

2 - This floor-to-roof distance has 5 ft (63%) of its vertical face open

**This layout would be considered enclosed.**