


100/04-16-13-28W1
Plot Plan

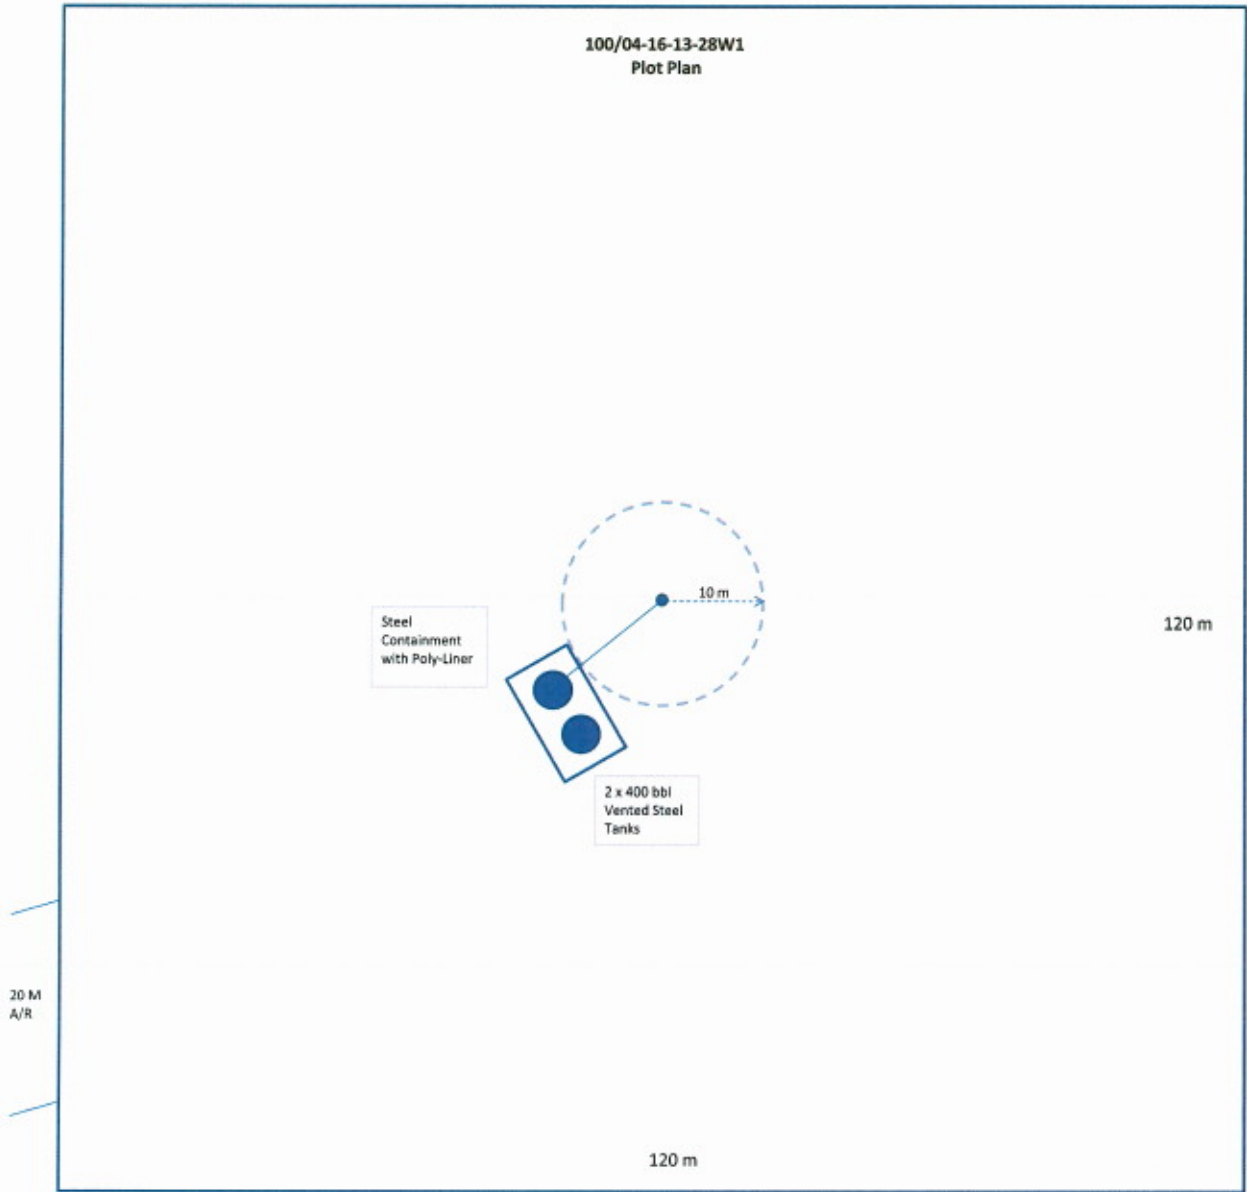

Steel
Containment
with Poly-Liner


2 x 400 bbl
Vented Steel
Tanks

120 m

120 m

20 M
A/R

2 Vented 400 bbl steel tanks

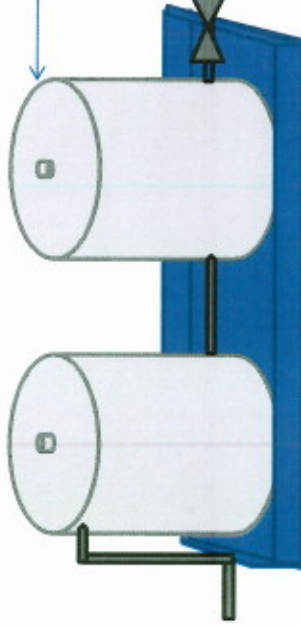

10 m Minimum

Fiberglass Line

Steel Poly lined berm

2000 psi stainless steel ball valve

Wellhead

Truck water into top of valve of tank

100/4-16-13-28W1 Disposal Set-up

- 2 - 400 bbl steel tanks
- Truck in water to top of first tank
- Water will equalize with second water tank
- Water will gravity drain from second tank into well

- Minimum 10 m long Fiberglass line from tank
- Valve at either end of 10 m line
- Check valve in line
- 2000 psi stainless steel ball valve on wellhead
- May add other valving as required